# GENERAL ARRANGEMENT

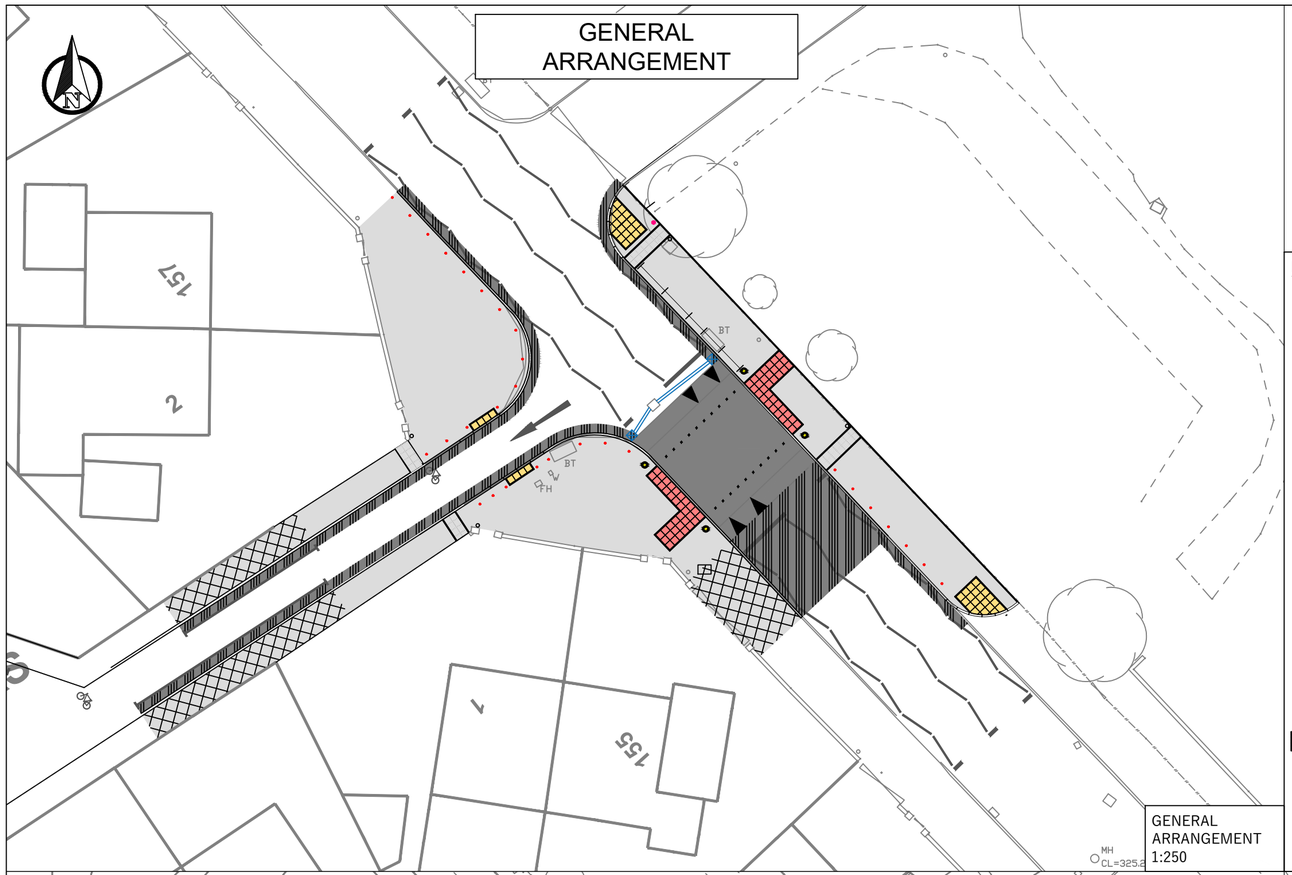


GENERAL ARRANGEMENT
1:250

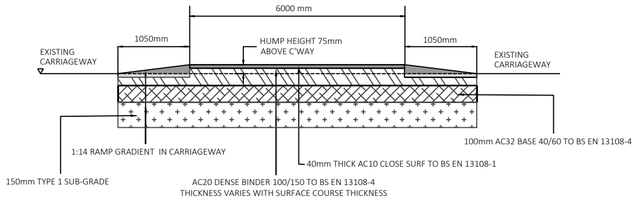


PROPOSED SECTION OF RAISED TABLE
(NTS)

KEY

- EXISTING CARRIAGEWAY TO BE TAKEN UP 200mm AND RESURFACED WITH 100mm AC32 BASE COURSE 40/60 TO BS EN 13108-4, 60mm AC20 DENSE BINDER COURSE 100/150 TO BS EN 13108-4, 40mm AC10 CLOSE SURF TO BS EN 13108-1 WITH PMB 75/130-75 TO BS EN 14023
- SEE RAISED TABLE FOR DETAIL
- 25mm AC6 DENSE SURFACE COURSE 100/150 TO BS EN 13108-4, 50mm AC20 DENSE BINDER 100/150 TO BS EN 13108-4. SUB BASE 150mm TYPE 2
- 25mm AC6 DENSE SURFACE COURSE 100/150 TO BS EN 13108-4, 50mm AC20 DENSE BINDER 100/150 TO BS EN 13108-4. SUB BASE 225mm TYPE 2
- PROPOSED TRAFFIC SIGNALS REFER TO TRAFFIC SIGNAL DESIGN FOR SPECIFICATION
- PROPOSED BLISTER TACTILE PAVING 400x400x65mm COLOUR: RED LAID ON 30mm SHARP SAND ON 100mm TYPE 2 SUBBASE MCHW CLAUSE 803. JOINTS BRUSHED WITH KIND DRIED SHARP SAND SURROUNDED BY PRECAST CONCRETE KERBS TYPE EF 255mm
- PROPOSED BLISTER TACTILE PAVING 400x400x65mm COLOUR: BUFF LAID ON 30mm SHARP SAND ON 100mm TYPE 2 SUBBASE MCHW CLAUSE 803. JOINTS BRUSHED WITH KIND DRIED SHARP SAND SURROUNDED BY PRECAST CONCRETE KERBS TYPE EF 255mm
- PROPOSED SIGN(S) AS ANNOTATED. SIGN MUST BE SET OUT BY BGCBC SITE SUPERVISOR OR PROJECT MANAGER ON SITE. SIGN FACE MUST BE AT LEAST 450MM FROM FRONT OF KERB. REFER TO SIGN DETAILS.
- PS PROPOSED CONCRETE GULLY WITH D400 COVER AND FRAME
- PROPOSED 150mm DRAINAGE PIPE TO BE INSTALLED LINKING PROPOSED GULLY TO MANHOLE
- GLASDON Hazardmaster™ Marker Post
- SIGN BOLLARD REFER TO SIGNAGE DRAWING
- FENCING AS PER SD C1
- RELOCATED LIGHTING COLUMN

# LINING

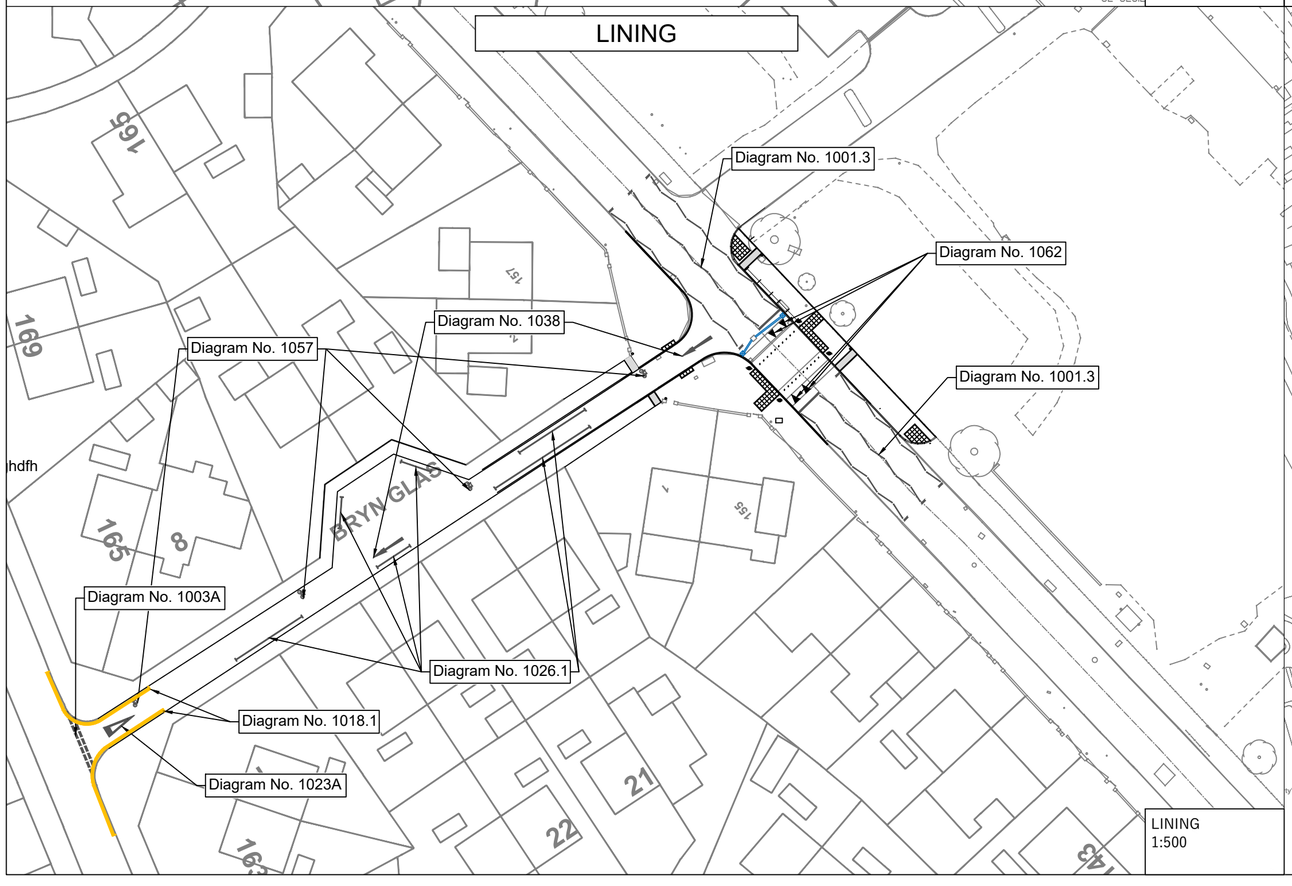


LINING
1:500

# SIGNAGE

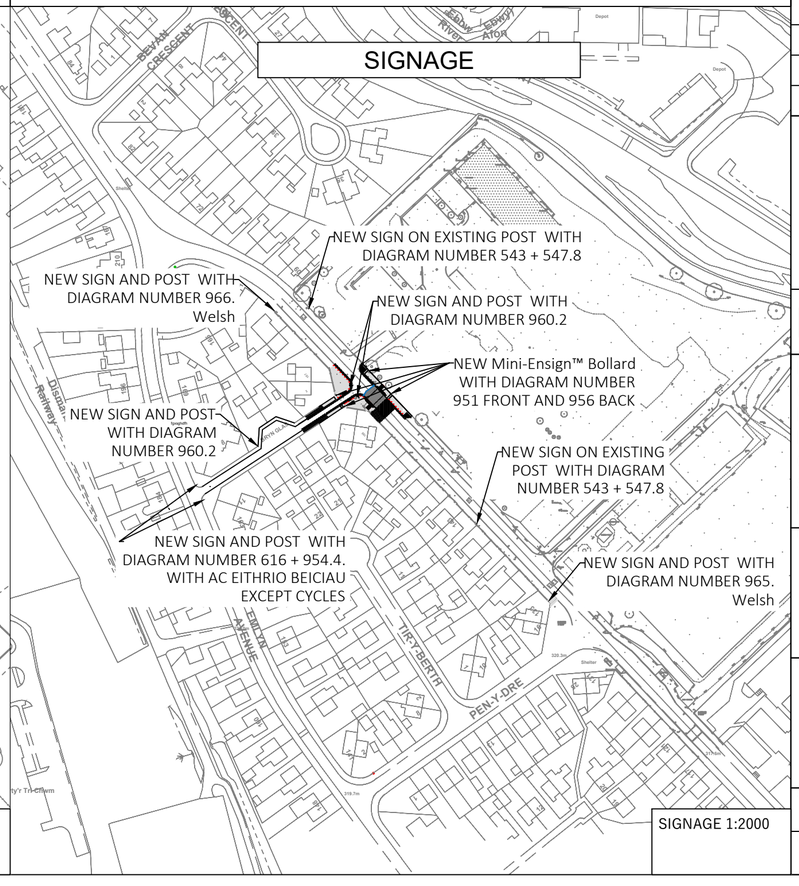


SIGNAGE 1:2000

THIS DRAWING SHALL NOT BE REPRODUCED IN WHOLE OR IN PART WITHOUT THE EXPRESS PERMISSION OF THE INFRASTRUCTURE SERVICES DEPARTMENT

DO NOT SCALE FROM THIS DRAWING

Unless otherwise stated all dimensions are in millimetres

## Legend

## Notes

FOR COMMENT

©Hawlfraint y Goron a hawliau cronfa ddata 2013 Arolwyg Ordnans LA 09002L
© Crown copyright and database rights 2013 Ordnance Survey LA 09002L

Revisions

| Suffix | Date | Initials | Description |
|---|---|---|---|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

Cyngor Bwrdeistdref Sirol Blaenau Gwent County Borough Council

Infrastructure Services

Mr. C Rogers B.Sc (Hons),
C.Eng.,M.I.C.E.,D.M.S., Dip.M.
Head of Community Services
Regeneration & Community Services Directorate
General Offices
Steel Works Road
Ebbw Vale, NP23 6DN

Project Title

TS2267 - GLYNCOED CROSSING

Drawing Title

General Arrangement, signage and lining

| Scale | Date | Drawn | Checked |
|---|---|---|---|
| As shown @ A2 | 01/2024 | GC | |

| Project Ref | Drawing No. | Rev |
|---|---|---|
| TS2267 | 001 | |